

# Small Lot Erosion Control

## Silt Fence



Goal is to trap soil and slow runoff velocities. Should be inspected weekly, or after weather events.

## Seeding


Good seeding promotes thick, even growth, reducing erosion from new construction sites.



## Drop Inlet Protection



Good berm construction keeps bottom of sides tightly in place, keeping sediment out of drains.

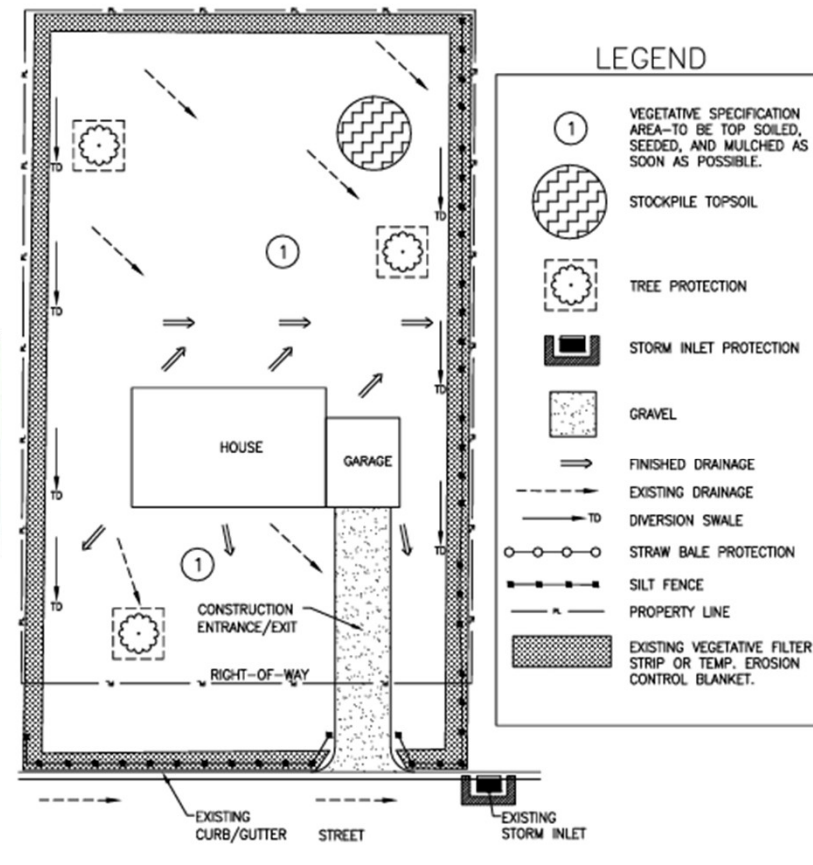

Lot Erosion Control Detail  
NOT TO SCALE

## Entrance/Exit



Goal is to create one entrance for all contractors to use to keep tires clean and prevent sediment from being tracked onto the roadway.

## Erosion Control Blanket



Use to prevent erosion and keep streets clean while construction exists. This is needed until vegetative cover is established.

## Inlet Protection



Goal is to place berms and filters at curb drains to filter muddy runoff.